

Step 1

Casting of Roof Slab with the addition of Water Guard Crysta Admix 103 in the concrete mix. (if Needed)










Note

conduits can be covered with a cement sand mortar comprising of **Ressi SBR 5850** and **Silmix.** Chamfers can also be made using the same materials. Along with the floor screed in slope



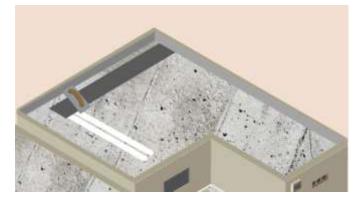










Step 2

Application of Water Guard 3020N.



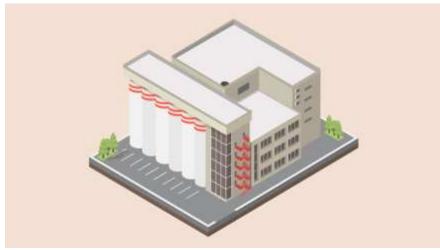





An easy to maintain effective solution for industrial roofs.











Thank You

Where To Find Us

D-83, S.I.T.E., Industrial Area, Manghopir Road, Karachi -75530, Pakistan.

Mobile: +92 309 7772464 **Tel:** +92-21-32593800-02

Fax: +92-21-32593803

Email: info@ressichem.com

Website: www.ressichem.com



