


Addition of Water
Guard P 200 in the
plinth beam of the
boundary wall concrete
mix.








Application of Water Guard 5010 over the plinth beam.

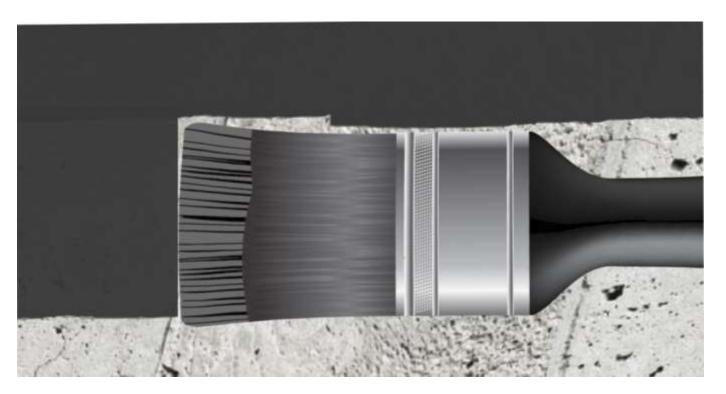





Addition of **Ressi SBR 5850** and **Silmix** in the masonry laying mortar.

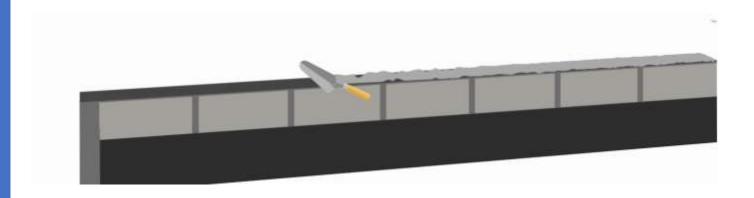








Addition of Ressi **SBR 5850** and **Silmix** in the Plastering / rendering mortar of the boundary wall.

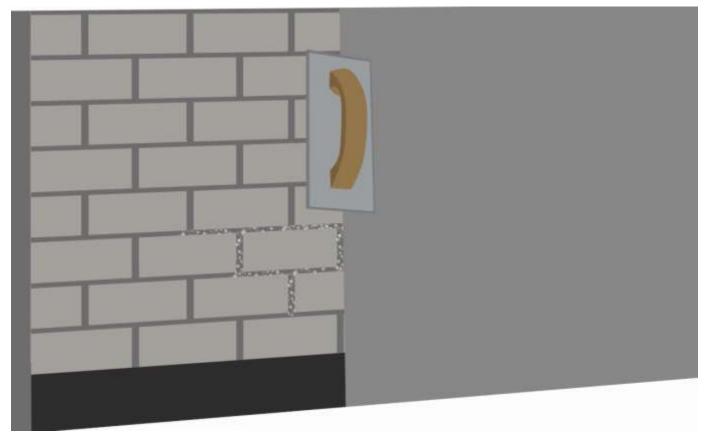











Application of **Paint Guard 10,000 C** over the plastered surface prior to paint.

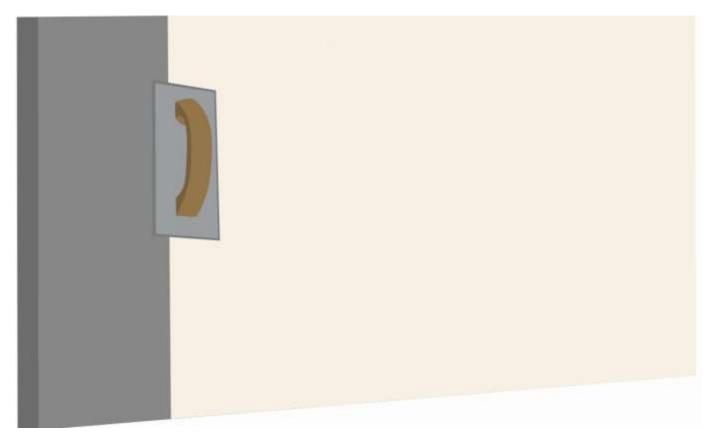





Painting the surface (if needed)

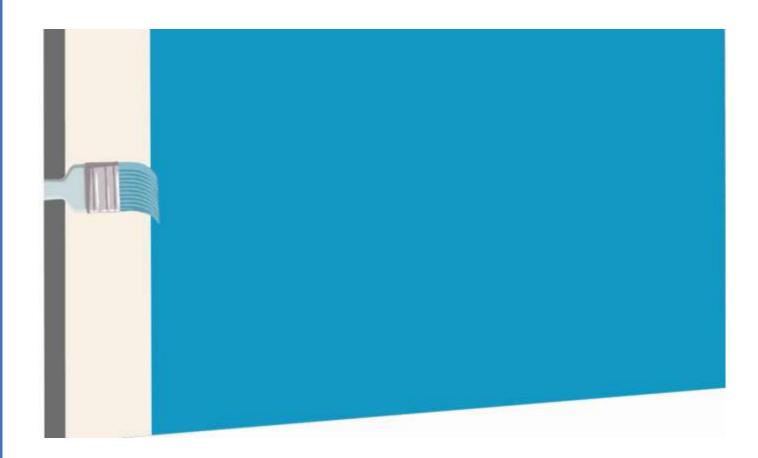



A Cost effective and Durable solution for the Waterproofing of Commercial Boundary walls.

















Thank You

Where To Find Us

D-83, S.I.T.E., Industrial Area, Manghopir Road, Karachi -75530, Pakistan.

Mobile: +92 309 7772464 **Tel:** +92-21-32593800-02

Fax: +92-21-32593803

Email: info@ressichem.com

Website: www.ressichem.com



