

Addition of Max Flo Integra 3 (Powder) in the plinth beam of the boundary wall concrete mix.








Application of Water Guard 491 over the plinth beam.







Addition of **Ressi SBR 5850** and **Silmix** in the masonry laying mortar.

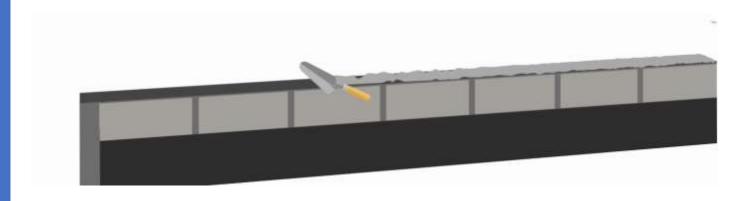








Addition of Ressi **SBR 5850** and **Silmix** in the Plastering / rendering mortar of the boundary wall.

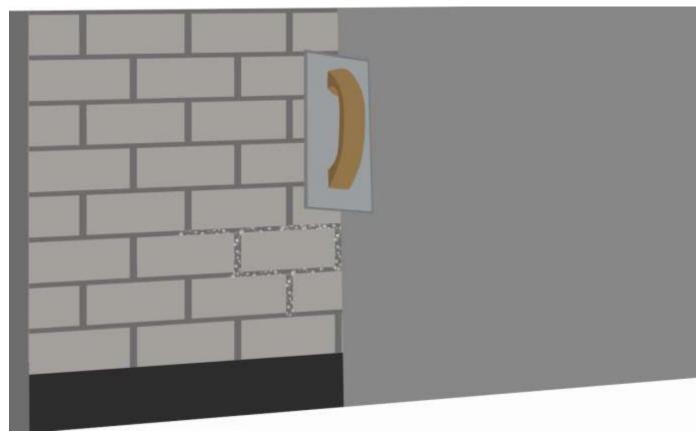










Application of **Paint Guard 10,000C** over the plastered surface prior to paint.

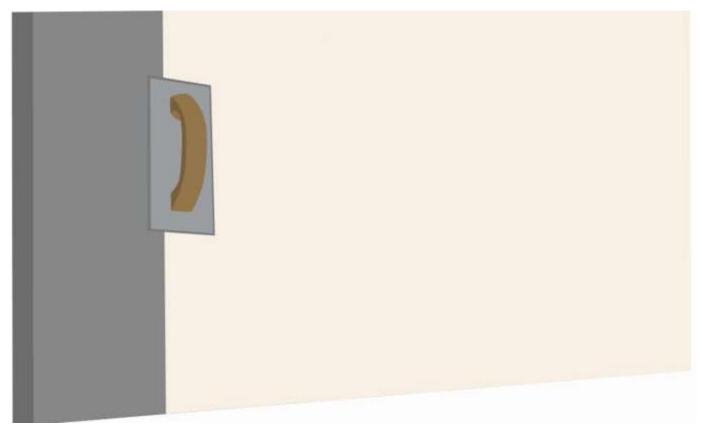





Application of Silblock over the surface of Paint Guard 10,000C.



POROUS CEMENTITIOUS SURFACES



An easy to maintain and economical waterproofing system for industrial boundary walls















Thank You

Where To Find Us

D-83, S.I.T.E., Industrial Area, Manghopir Road, Karachi -75530, Pakistan.

Mobile: +92 309 7772464 **Tel:** +92-21-32593800-02

Fax: +92-21-32593803

Email: info@ressichem.com

Website: www.ressichem.com



