

FILLING OF UTILITY CONDUITS FOR NEW CONSTRUCTION (WALLS).



Summary of application

STEP 1: Cutting the masonry and concrete conduits.

STEP 2: Laying the Conduit Pipes.

STEP 3: Filling up the conduits using **Crack Heal 910** & applying metal mesh over the joint surface.

STEP 4: Finishing the wall Surface with plaster & relevant finish.

Detailed description


Filling of electrical, gas & plumbing conduits over masonry & concrete walls usually present a difficult challenge. Filling these conduits with conventional cement & sand mortar usually results in a

variety of problems such as cracks & hollow sound of plaster over the wall surfaces. To tackle these issues, it is essential to use the right products with the right methodology.

Step 1: Cutting the masonry & concrete conduits.


It is recommended to cut the masonry walls for conduits using suitable mechanical means like a grinding machine & mechanical chipping and cutting machines. If an existing plastered surface is being cut over, it is recommended to mark the cutting surface. Use a grinder to cut the opening and then removing the Centre part.

Although it is not recommended to cut any structural concrete masses, if there is a requirement to cut the concrete mass for conduiting, it is essential to check & make sure that no reinforcement steel is cut to make room for the conduits. In case there is a need to cut the steel of the concrete member, please consult a structural engineer.

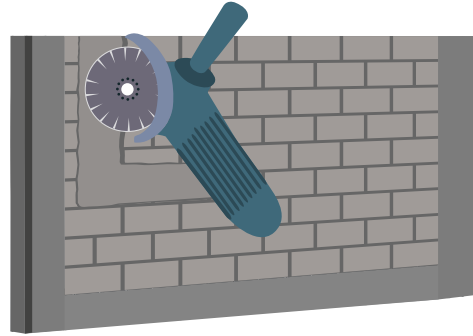

Step 2: Laying the Conduit Pipes.

Once the area under consideration is cut, the conduit pipes are passed through. It is also recommended in case of electrical conduiting, the wires should also be passed through the pipes before the conduit has been filled up (if possible).

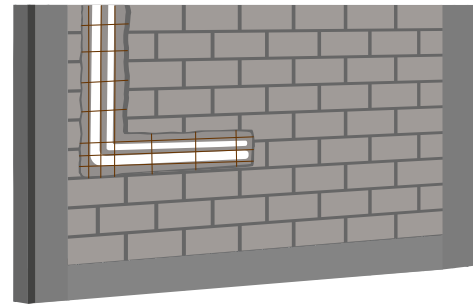

Step 3: Filling up the conduit using Crack Heal 910.


Proper product preparation methodology for the mixing of **Crack Heal 910** is to be followed (Please refer to the product

preparation methodology of the product from its technical datasheet). It is essential to make sure that the mortar of

FILLING OF UTILITY CONDUITS FOR NEW CONSTRUCTION (WALLS).




Crack Heal 910 is placed in all the smaller & cramped areas of the conduit space all together. Once a proper filling of **Crack Heal 910** is done within the conduit, it is recommended to apply a metal mesh over the conduit surface. The metal mesh should overlap at least 6 inches either side of the masonry, plaster, or concrete surface where the conduit is being laid.

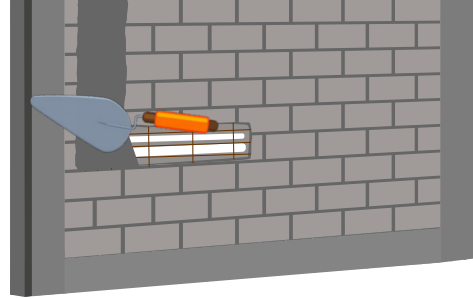


Step 4: Finishing the wall surface.

Once the metal mesh has been applied, Plastering can be done over the surface of **Crack Heal 910**. The Recommended plaster in this case is **Ressi PlastoRend 120**. If this product cannot be applied, it is recommended to use **Ressi SBR 5850** along with the cement and sand mortar to avoid cracking of the plaster over the surface. The recommended dosage of **Ressi SBR 5850** is 1 KG per 50 KG Bag of cement in this case.

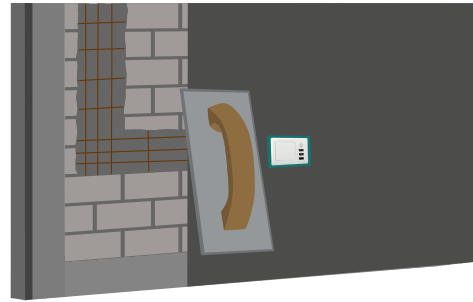

System Summary

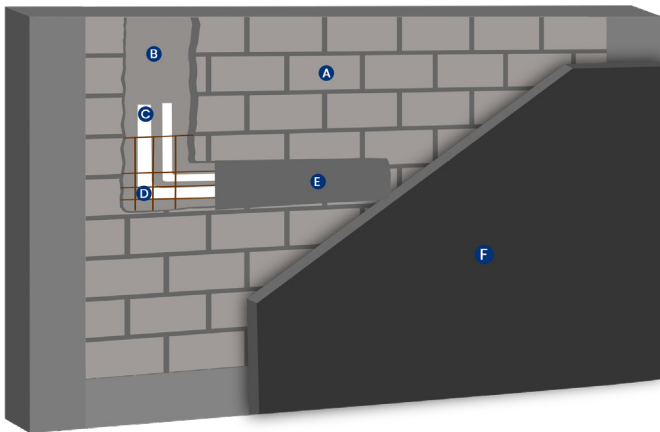

FILLING OF UTILITY CONDUITS FOR NEW CONSTRUCTION (WALLS)

- A: Block / Brick Masonry
- B: Cutting open masonry wall
- C: Conduit pipes
- D: Metal mesh
- E: Crack Heal 910
- F: Base plaster or Ressi PlastoRend 120